
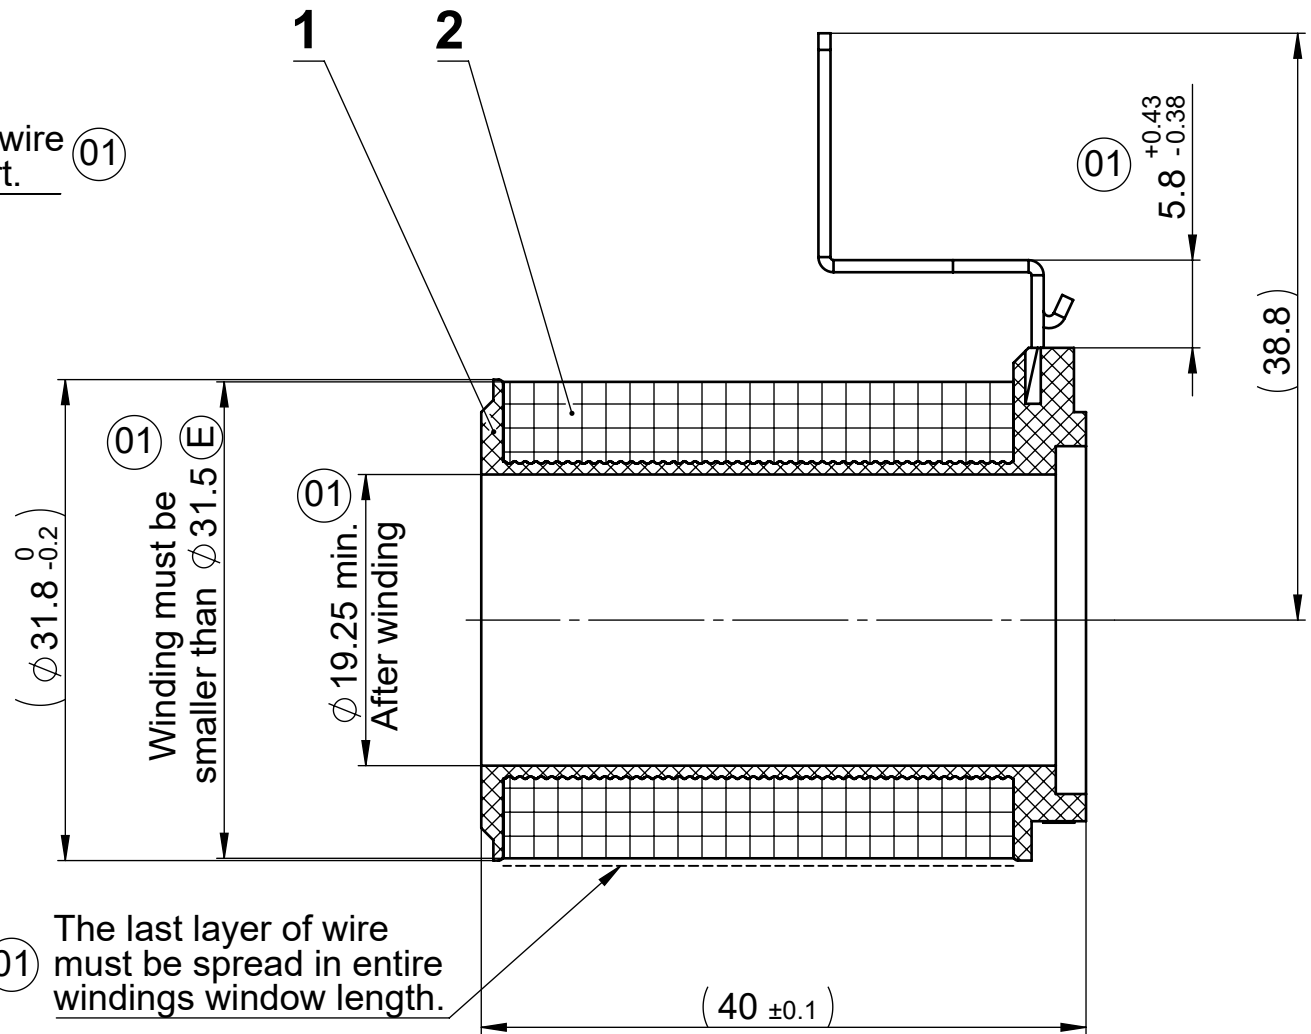
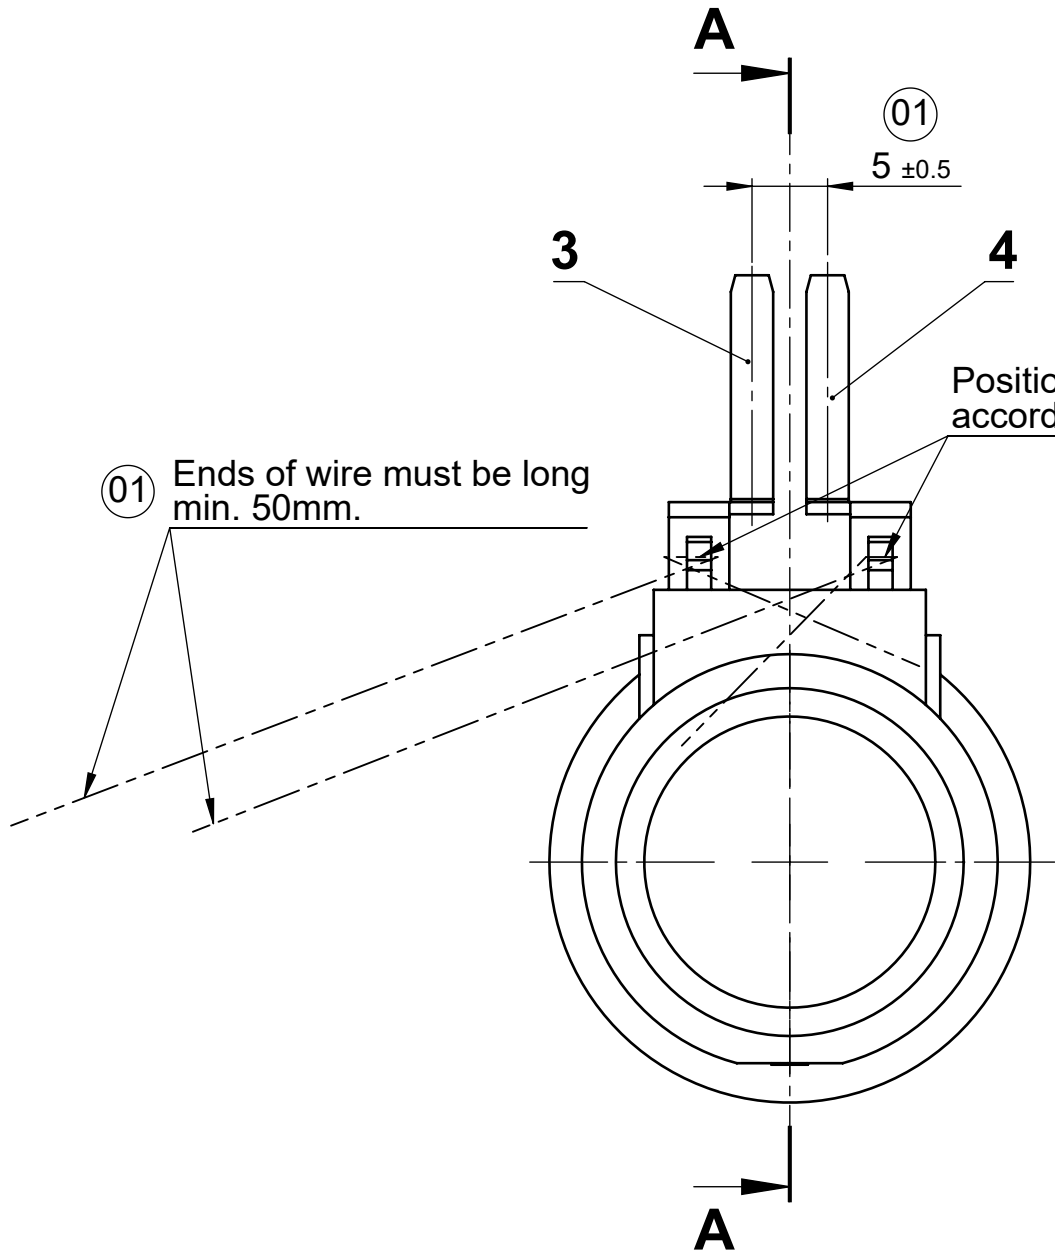




APPROVED

By Kendrion (Prostějov) s.r.o. at 2:15 pm, Jun 23, 2021

Parameters of winding			
Description	Mark	Value	Unit
Diameter of wire (Special dimension for Kendrion)	d	0.65	[mm]
Number of turns	N	380	[turns]
Resistance at 20°C	R ₂₀	1.56 to 1.70	[Ohm]
Insulation class of wire	Class 200	200	[°C]
Specification of wire	EN-PN 60317-13	-	-

Marking # #		Definition = "Special characteristics" acc. to guideline: A VS RD GL 0001-V3.0								
Technical changes reserved	 Projection ISO 128-1 (E)			Scale 2:1	Size ISO A3	Material		Material no.		
				Made out of		Calculated Weight 100.48 g	Calculated Volume 0.01900 dm ³			
Dimensions in mm		Kendrion (Prostejov) s.r.o.		Standard designation Wick.03 0,65 380Wdg 1,56 1,70						
General tolerances ISO 2768 - mK	Tolerances ISO 8015	First release			Description Spule COIL					
Nominal size range 0.2 ... 0.5 mm: Length dimension ±0.05 mm Radii, Chamfers ±0.1 mm			Date	Name						
		Drawn	02.Jun.21	Hubicka						
		Released	02.Jun.21	Dolezel						
Geometrical product specifications Size ISO 14405		Last revision			Drawing no. 30 45U0303 B52					
Protective note acc. to ISO 16016 to be observed !	ECN no.	Date	Name	Rev.						State
	C2100048									
SolidWorks		Revised	16.Jun.21	Hubicka	Repl. for drawing		Developed from			
		Released	23.Jun.21	Dolezel						
								01	PSO	