


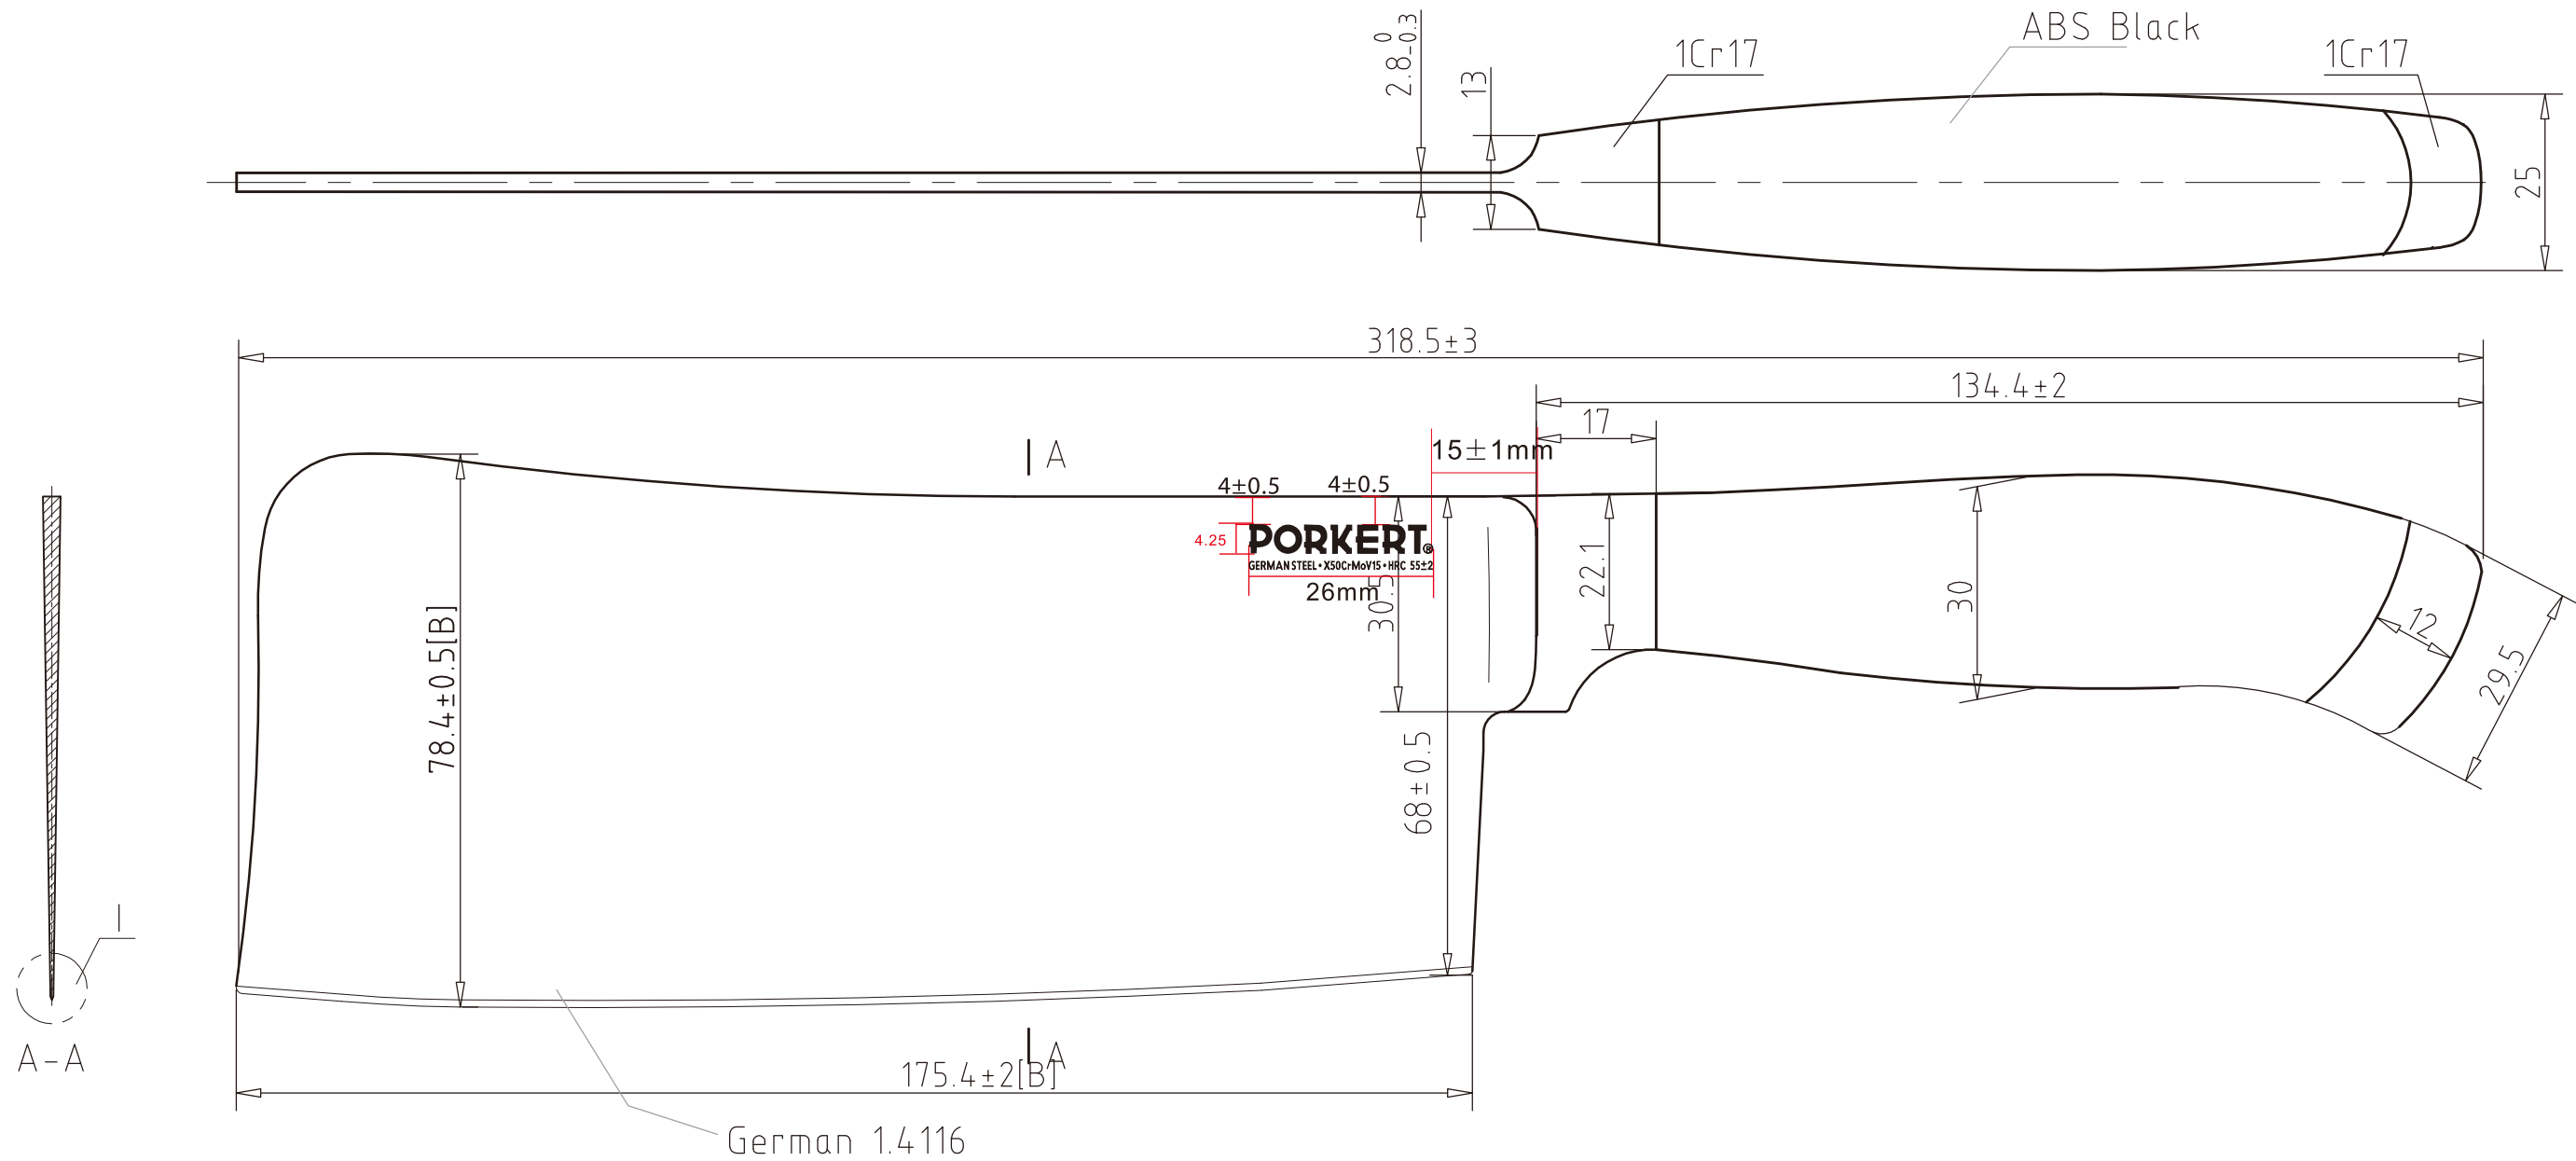

Tolerance unless  
otherwise specified

0-3mm  $\pm 0.5$

>3-30mm  $\pm 1$

>30-120mm  $\pm 1.5$

>120mm  $\pm 3$

| The part of knife                                                                                                                          | Material                                                                             | Product identification |                      |
|--------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|------------------------|----------------------|
| Blade                                                                                                                                      | ISO 1.4116 - German Stainless steel; HRC 55 $\pm$ 2; Taper grinding, stone finishing | Drawing no.            | TCP-005              |
| Bolster                                                                                                                                    | GB/T 1Cr17                                                                           | Description            | 7" Cleaver 6.06.2021 |
| Rivet                                                                                                                                      | GB/T 1Cr13                                                                           | Scale                  | 1:1                  |
| Handle                                                                                                                                     | ABS black; satin finish                                                              | Date                   |                      |
| Stains, chips, burrs, cracks and scratches are not allowed. Inspection will be with AQL Cr 0/Maj 2.5/ Min 4.0 level II, accord. ISO 2859-1 |                                                                                      |                        |                      |
| The product is produced and tested according to the standard ISO 8442-5:2004                                                               |                                                                                      |                        |                      |