
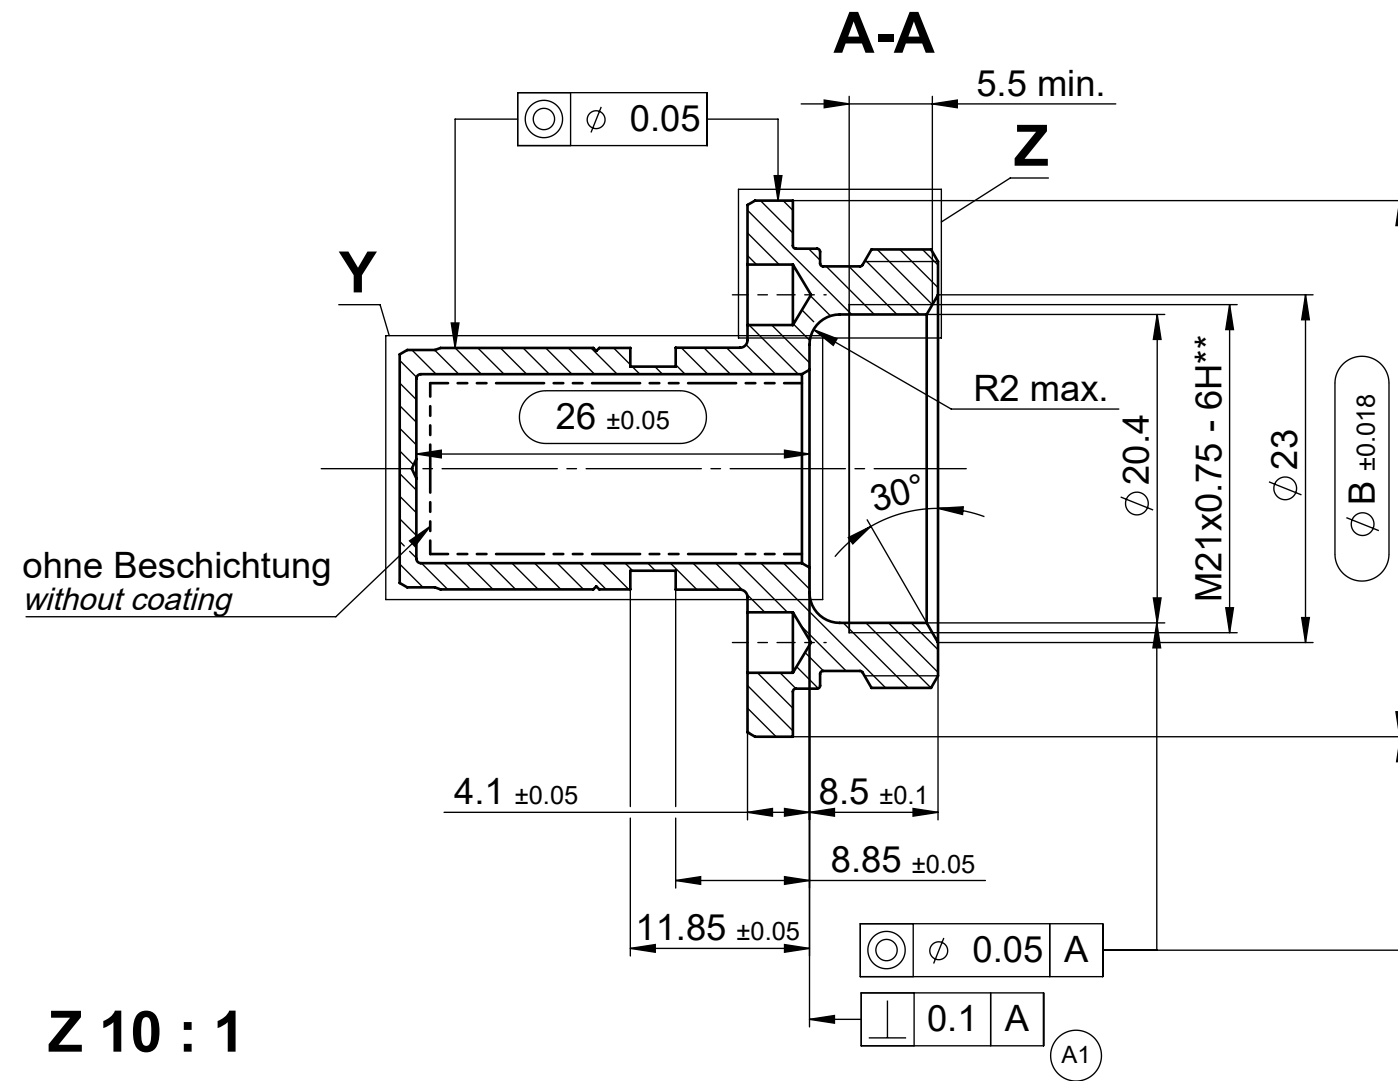
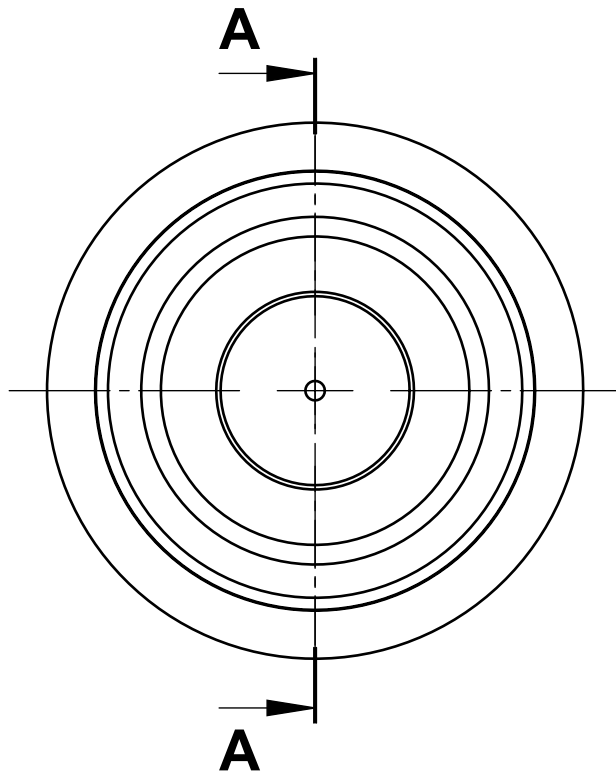
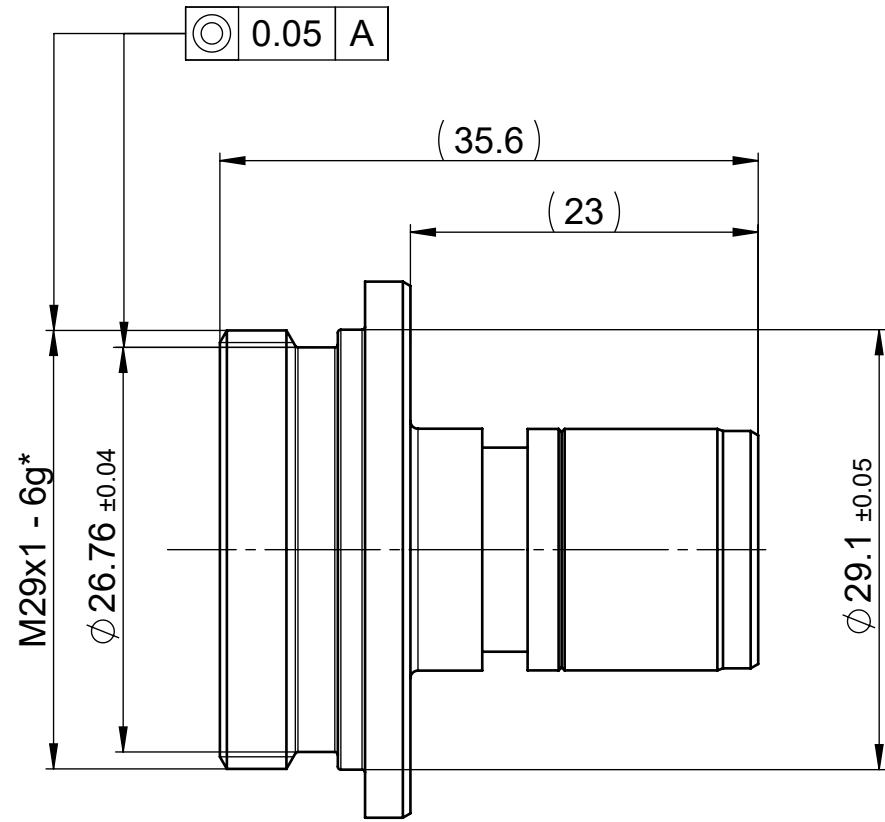


Der deutsche Text ist maßgebend für die Angaben in diesem Dokument !
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design registration.

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design registration.



KENDRION GmbH
[Schutzvermerk ISO 16016 beachten*]
*protective note acc. to ISO 16016 to be observed

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz.
All rights reserved in the event of the grant of a patent, utility model or design registration.

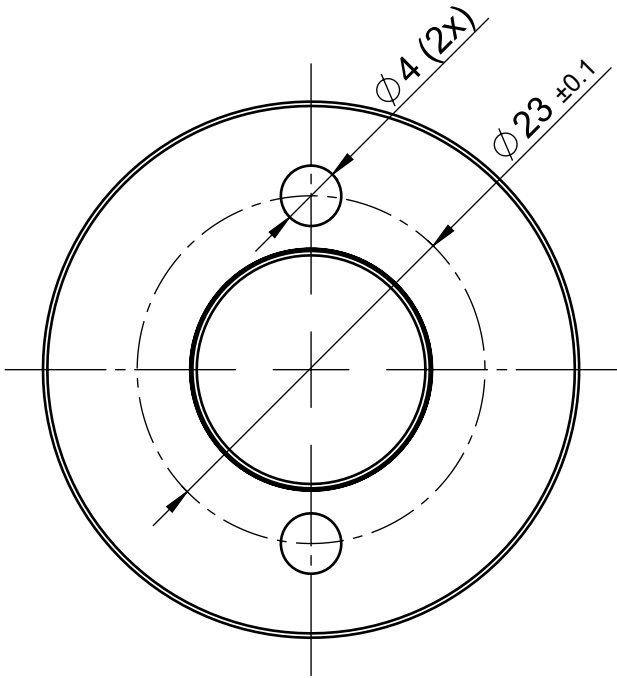


Y 5 : 1

Z 10 : 1

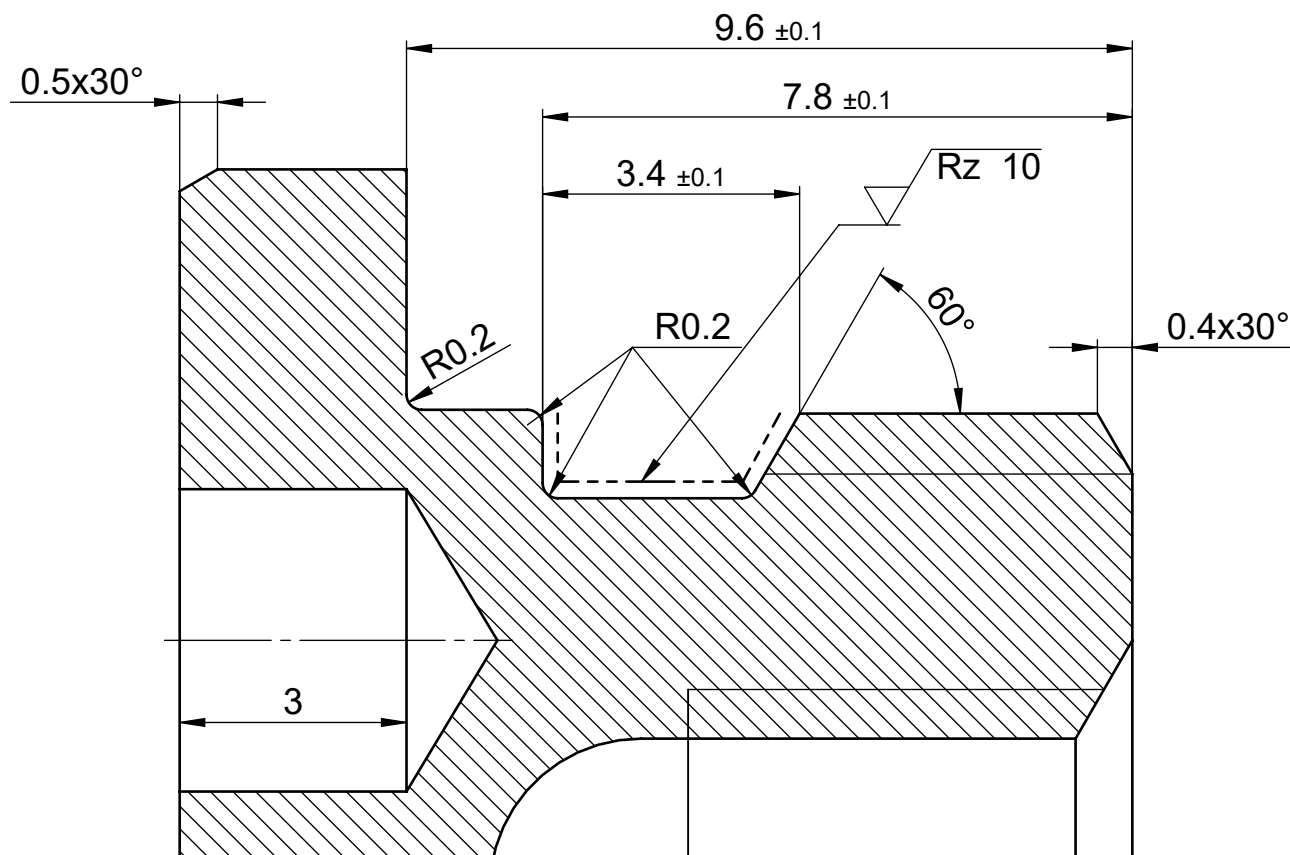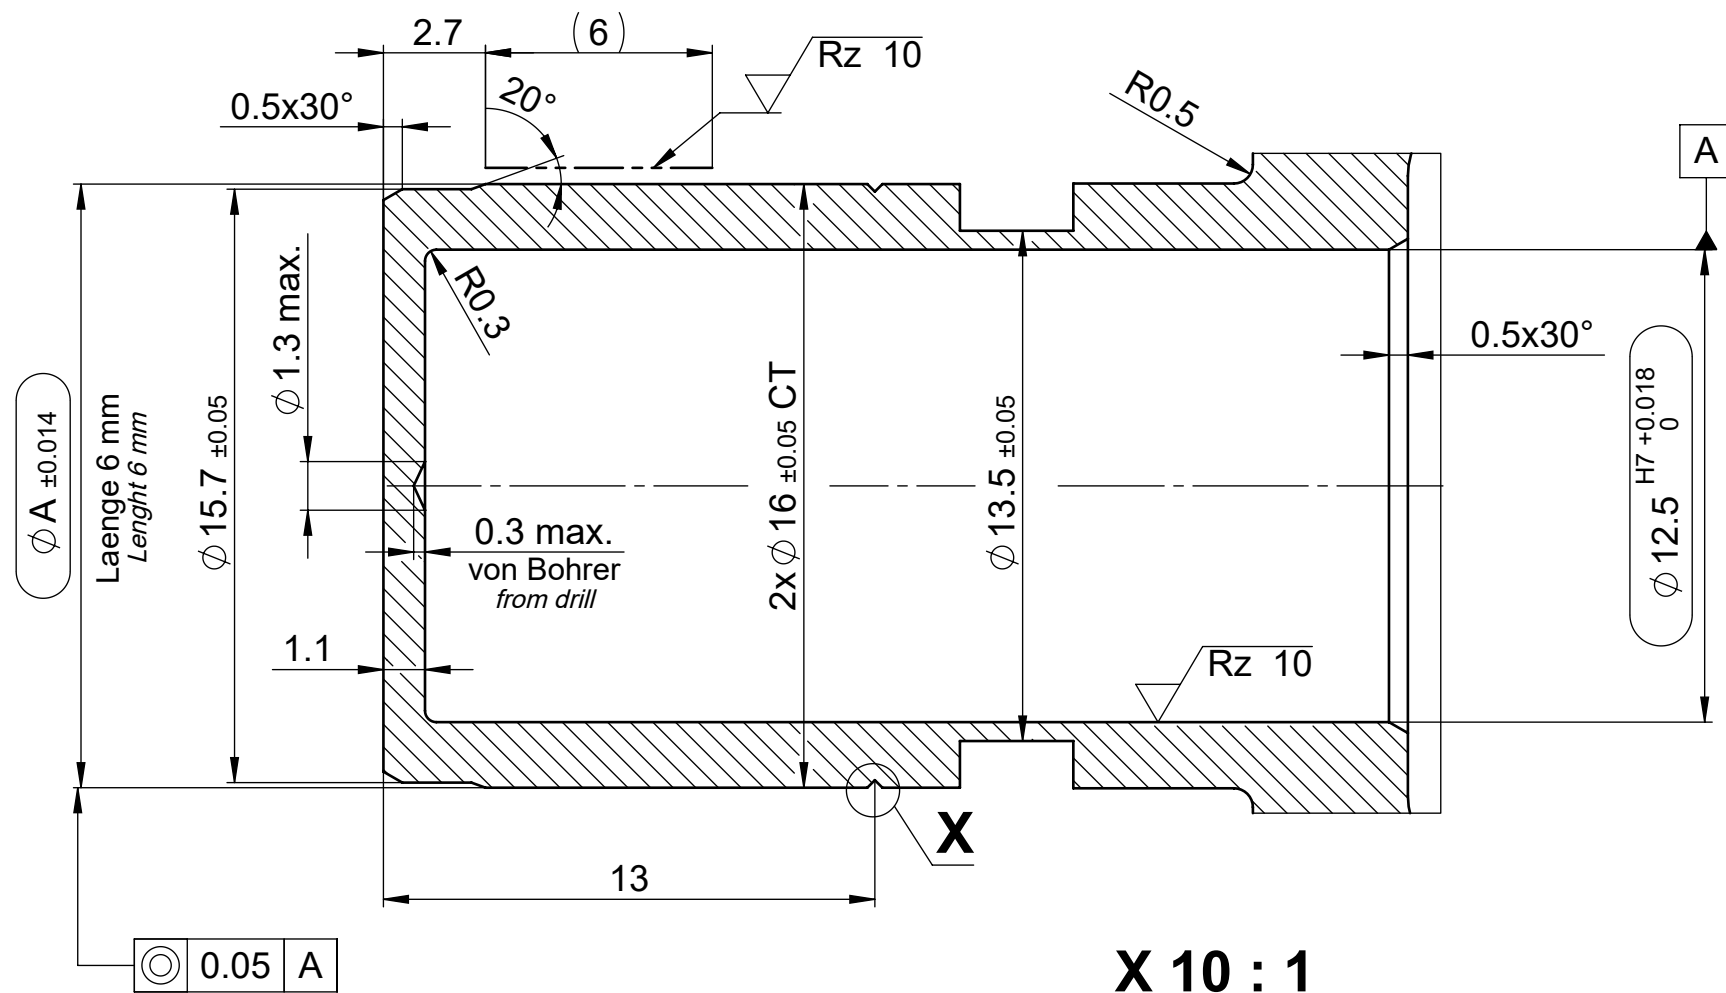

X 10 : 1

Marking of version no. 2



	A	B	Marking
Version no.1	15.994	35.484	NO
Version no.2	15.994	35.504	YES

Frei von Schlagstellen und Rissen
without battered and cracks

- ☐ Prüfmasse
Maschinenfähigkeit nachgewiesen
Cmk ≥ 1,67; 50 Stück
- ☐ inspection characteristics
machine capability verified
Cmk ≥ 1,67; 50 parts

*Beachten: Vor der Oberfläachenbeschichtung DIN 50979-Fe//ZnNi8//Cn//T0 - M29x1-6e
*Attention: Before the coating DIN 50979-Fe//ZnNi8//Cn//T0 M29x1-6e
**Beachten: Vor der Oberfläachenbeschichtung DIN 50979-Fe//ZnNi8//Cn//T0 - M21x0.75-6F
**Attention: Before the coating DIN 50979-Fe//ZnNi8//Cn//T0 - M21x0.75-6F

BMW GS90010-1/ZNNI S18
(DIN 50979-Fe//ZnNi8/Cn//T0)

Beschichtungdicke von 8 bis 16 µm
Coating thickness from 8 to 16 µm

Oberfläache=60.7 cm²
Surface=60.7 cm²

-	-	-	-	-
A1	1x	Adding surface perpendicularity		08.02.21 RFK/MKY
Index Rev./rev.	Anz. Qty	Änderung / Revision		Datum Date

Kennzeichnung / Marking		#	Definition = "Besondere Merkmale" nach Richtlinie / "Special characteristics" acc. to guideline: A VS RD GL 0001-V1.0	
Projektionsmethode PROJECTION ISO 128 1 (E)		Teil-Klasse PART-CLASS B	Allgemeintoleranz / GENERAL TOLERANCE ISO 2768-mK	Nennmassbereich / NOMINAL SIZE RANGE 0.2 ... 0.5 mm Laengennmasse LENGTH DIMENSION ± 0.05 mm Radien, Fasen RADI, CHAMFERS ± 0.1 mm
-	-	-	Geometrische Produktspezifikation GEOMETRICAL PRODUCT SPECIFICATIONS Size ISO 14405	Volumen VOLUME [cm³] 57.478
-	-	-	Tolerierung / TOLERATION ISO 8015	Werkstoff, Ausgangsteil / MATERIAL, INITIAL PART P180116-012100
-	-	-	Datum / DATE 28.01.2019 Gepr. CHECK 25.10.2019	
-	-	-	Name / NAME Boril Farlik/ Kopecky	Benennung / DESCRIPTION Rohr TUBE
-	-	-	CAD SolidWorks	Zeichnungsnummer / DRAWING NO. P180116-012000
Index REV./I.	Anz. Qty.	Änderung REV. DESC.	Datum DATE	Status / STATUS Vorserie
-	-	-	-	Format / SIZE A2 Blatt / PAGE 1 von / OF 1
PASSENGER CARS			Ers. f. / REPL.	Massstab / SCALE 2:1